TRUCK / CV SPECIAL 2025







Assistent

176N-7/193 EAN-No. 4000896264810

with 193 expert tools • With new inserts: 163-613/152 / 163-614/16

• Mini reversible ratchet for bits 863MB

Assistent[®] 176N-7

• SmartCase 2200SC-3


NEW!

193


NEW!

176N-7 Assistent Made in Germany

- Newly designed modern plastic cover with textures and large recessed, fully usable work surface
- Handle and swivel castors can be mounted either on the left or right
- Bevelled edges prevent damage
- Numerous fastening options for further accessories on both sides and rear screw-on points
- 2-stage locking system (central locking and mutual drawer locking)



- Our perfect organisation system for your tool trolley
- All your tools are snugly embedded in high-quality 2-component soft foam inserts
- Endless combination options mean you can arrange yourtrolley according to your needs
- You can find more inserts

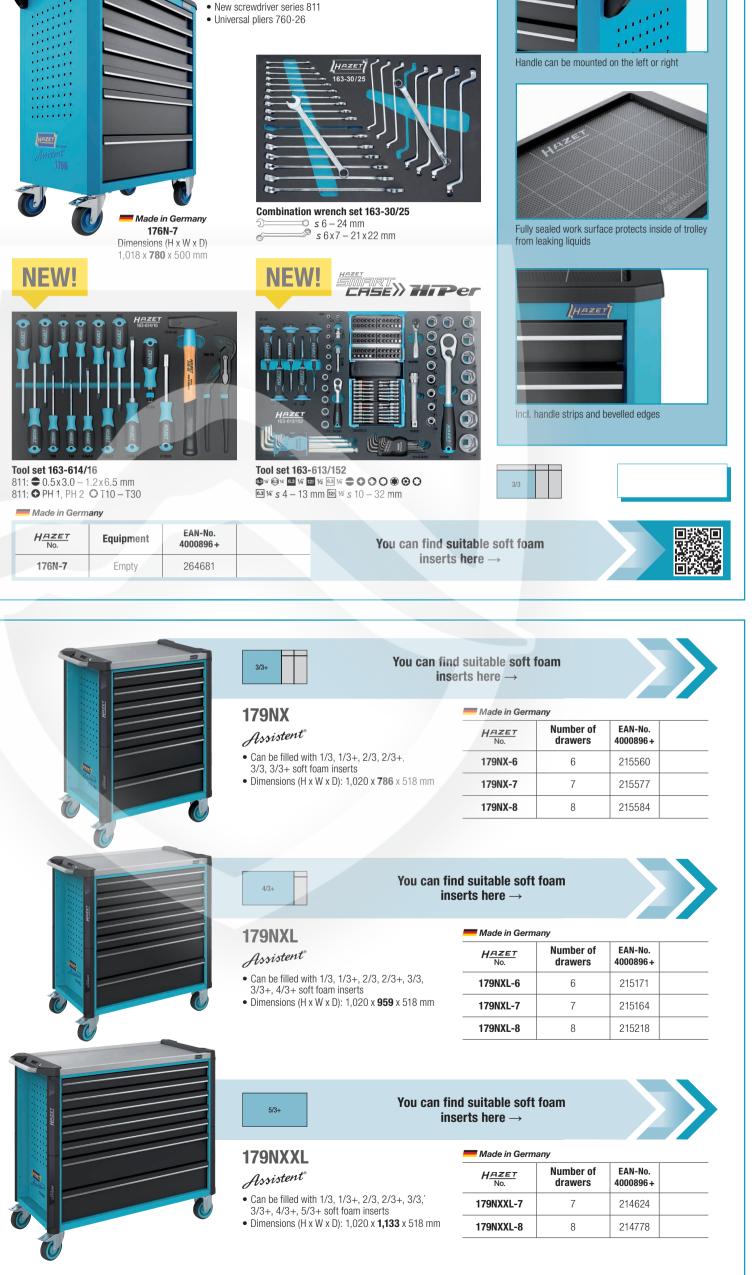

at: www.hazet.de




H <u>AZET</u> No.	Number of drawers	EAN-No. 4000896+	
179NXL-6	6	215171	
179NXL-7	7	215164	
179NXL-8	8	215218	

1	Made III Gerifi	any		
	H <u>AZET</u> No.	Number of drawers	EAN-No. 4000896+	
	179NXXL-7	7	214624	
		0	014770	



Tool assortments for soft foam inserts **Our commercial vehicle recommendations!**



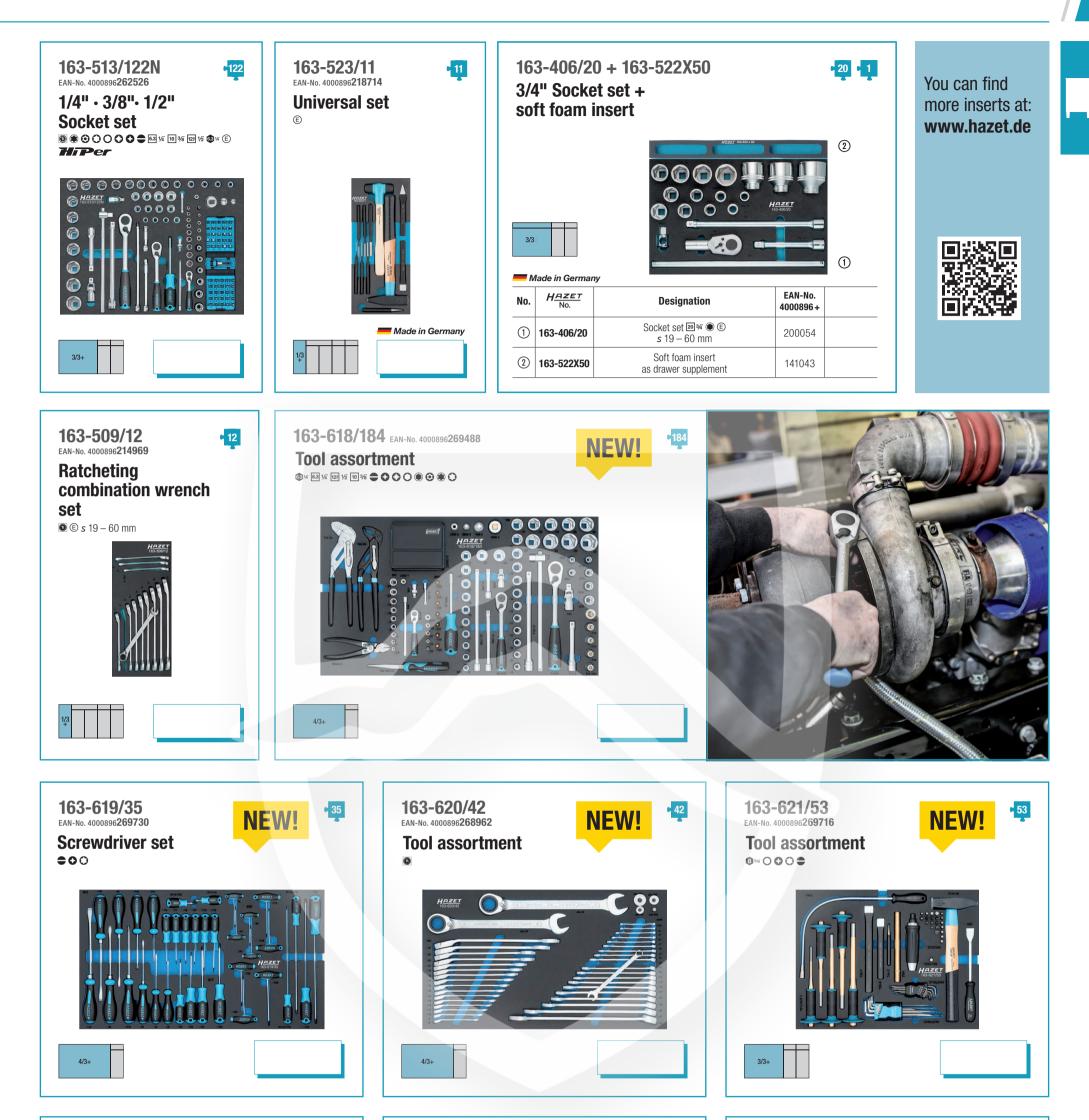



Box-end wrench set striking face pattern 20 3⁄4" 🔘 🔘



163-623/4 EAN-No. 4000896**269020**

3

NEW!



Box-end wrench set striking face pattern 20 3⁄4" 🔘 🔘

H<u>AZET</u>



EAN-No. 4000896**269044 TORX®** box-end wrench set - striking face pattern 20 3⁄4" 🌘 🔘

163-624/3



NEW!

3

www.hazet.de 3





TecDoc® Data supplier





600N/21 EAN-No. 4000896023356



600LG

Combination wrench set


- Surface: chrome-plated, head polished
- DIN 3113 form A, ISO 3318, ISO 7738
- $s 6 \cdot 7 \cdot 8 \cdot 9 \cdot 10 \cdot 11 \cdot 12 \cdot 13 \cdot 14 \cdot 15 \cdot 16 \cdot 17 \cdot 18 \cdot 19 \cdot 21 \cdot 22 \cdot 24 \cdot 27 \cdot 30 \cdot 32 \cdot 34 \text{ mm}$
- Output: outside 12-point traction profile









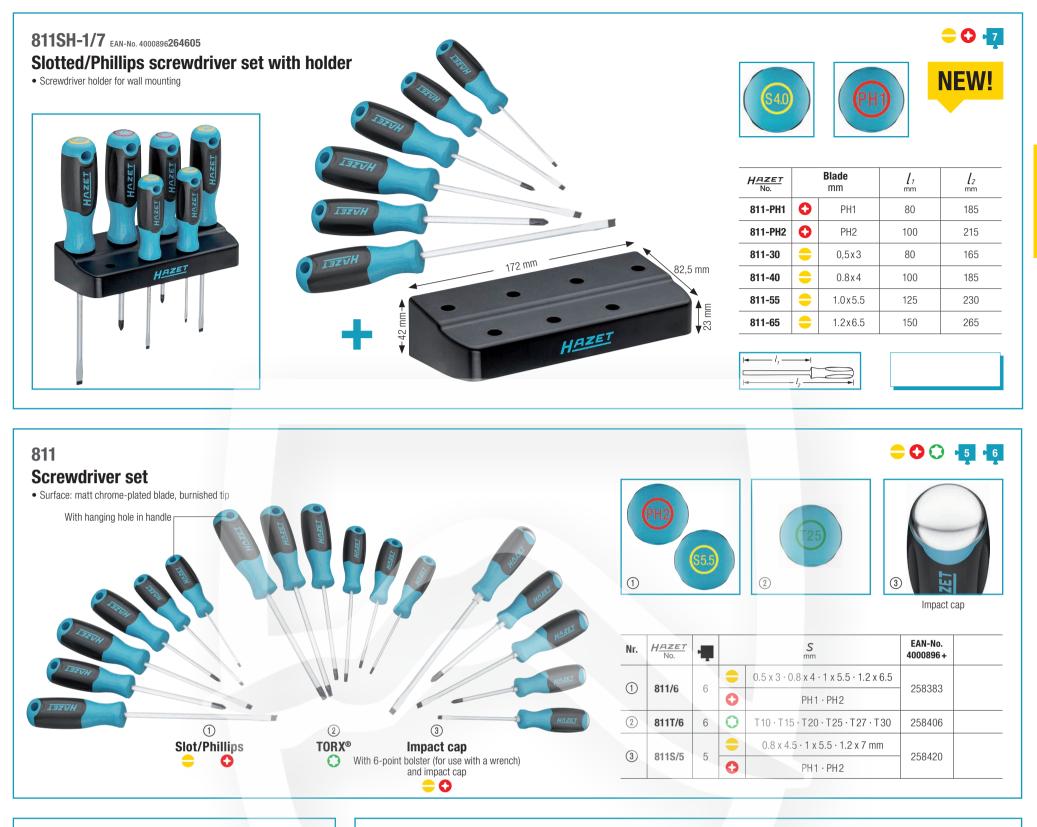

606

Ratcheting combination wrench set

R

5 6

- Ratchet function with one-hand reversing switch
- Fine tooth, 72 teeth, rotation angle 5°
 Box-end side 13° offset
- Surface: chrome-plated
- Output: outside 12-point traction profile



810R

1/4" Ratcheting bit screwdriver with built-in magazine

- Ratchet function is convertible or for use as normal screwdriver
- Bit magazine is easy to open by pressing a button while pulling
- Comfortable to hold and offers effective impact
- Length: 170 mm (closed, without extension)





H <u>AZET</u> No.	·	S mm	EAN-No. 4000896+	
606/5	5	8 · 10 · 13 · 17 · 19	177998	
606/6-1	6	21 · 22 · 24 · 27 · 30 · 32	175178	

810R-3

EAN-No. 4000896**239658**

Set includes 12 screwdriver bits

● >>>> ● 0.5 x 4.0 · 1.2 x 6.5 mm ● < < PH1 · PH2 ● < < PZ1 · PZ2
• • • • • • • • • • • • • • • • • • •
○ □□□□ ◎ ^s 4 · 5 · 6 mm
O ===> ● ■ T15 · T20 · T25



Set includes 12 screwdriver bits

•) and	63 14	0,8 x 5,5 mm
0		63 14	PH2 · PH3
0		63 14	<i>s</i> 3 · 4 · 5 · 6 mm
0		63 14	T15 · T20 · T25 · T27 · T30

HAZET

811R



Press lock release and pull apart

The magazine opens



Choose a screwdriver bit



Attach screwdriver bit and lock

Errors excepted.






H<u>aze</u>t SMRRT SERIE >> 21 D ήĒ SmartCase SmartHolder SmartRa

Discover our Smart Series

- · Concept idea: Maximum number of tools stored in the smallest possible space for the best possible overview
- Functionally designed tool storage with pleasant feel
- Tool supplement "To Go": should always be taken along when there is something to be screwed quickly

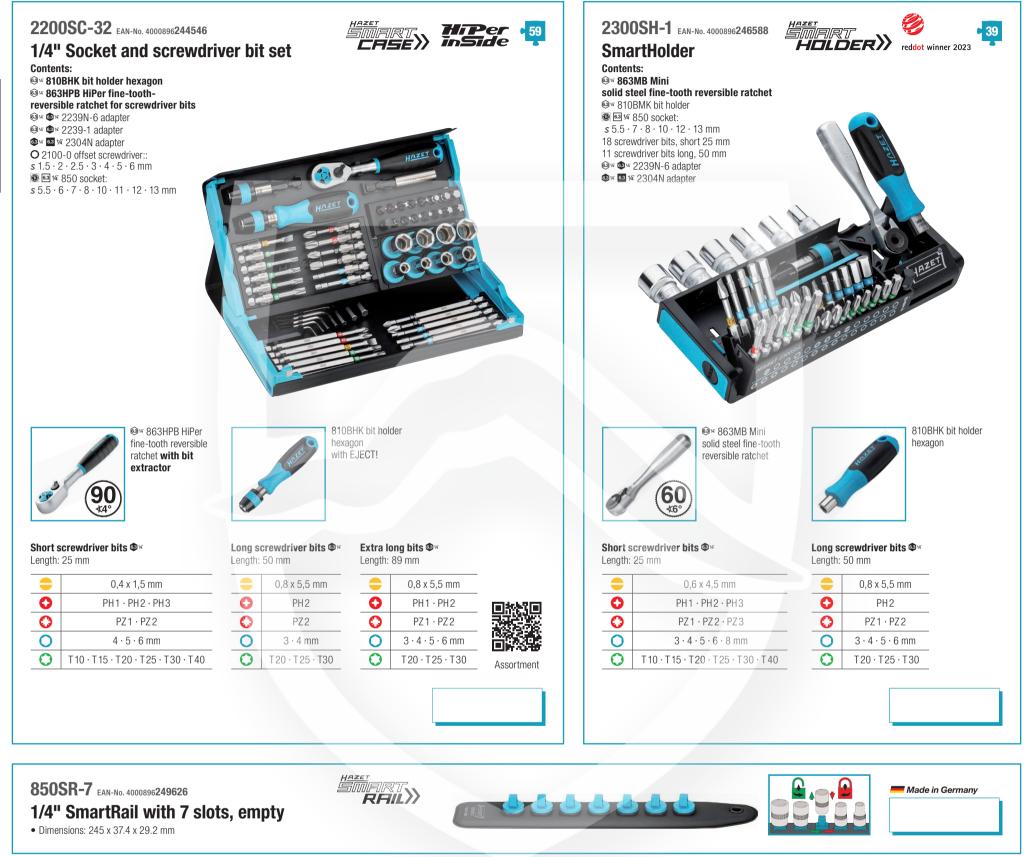

900SR · 992T-SR 1/2" SmartRail with slots for sockets

- Magnetic underside ensures grip on all ferrous surfaces, e.g. on tool trolleys, tool panels, machines, lifting platforms and in metal drawers
- Flexible plastic connector strip with 1/2" square slots
- Easy to clean material and pleasant surface feel
- Durable, robust twist lock for a tight fit and instant access
- Securely fixed when locked, turn socket left to remove
- Incl. robust metal lug for hanging, e.g. on a hook



SmartRail with fitted slots

Made in Germany

No.	H <u>AZET</u> No.		Slots	Contents	LxW mm	EAN-No. 4000896+	
3	900SLG-SR/5	125 1⁄2 ©	5	Socket, long s 13 · 17 · 19 · 22 · 24 mm	245 x 37,4	245277	
4	992T-SR/8	125 1⁄2 O	8	TORX®, short s T20 · T25 · T30 · T40 · T45 · T50 · T55 · T60	365 x 37,4	245376	

SmartRail with empty slots

Sma	rtkall w	ith e	mpty slots		🦰 Ma	de in Germany
No.	H <u>AZET</u> No.		Slots (empty)	LxW mm	EAN-No. 4000896+	
1	900SR-5	125 1⁄2	5	245 x 37.4	244508	
2	900SR-8	125 1⁄2	8	365 x 37.4	244515	



RAIL》

Grip pliers wrench | Universal pliers



Grip pliers wrench series 762 and universal pliers series 760:

- Developed and produced by HAZET "Made in Germany"!
- Compact and at the same time highly resilient

• Convenient - thanks to quick adjustment with proven HAZET tip / step lever function

• High corrosion resistance due to chrome-plated, easy-to-clean pliers legs • Heavy-duty pliers legs made of case-hardened chrome vanadium steel • Pleasant to grip thanks to double dip coating – lies well in the hand! • Fine detent enables any wrench size in the clamping range

• One-hand presetting possible

Grip pliers wrench series

• Permanent laser-marked scaling for easy setting and reading

Detent distance

mm

2,0

2,0

2,0

2.5

762

Made in Germany

[mm

125

150

180

260

HAZET No.

762-12

762-15

762-18

762-26

• Available in four lengths in 125, 150, 180 and 260 mm

Detent positions

Number

12

15

19

20









Flat material



One-hand operation with tip/step lever function

Clamping range lasered

ive jaws for HEA
Image: Non-optimized state Image: Non-optimized state <th< td=""></th<>

760

Universal pliers series

- Long service life due to extremely hard jaw serration
- Precise detent distance with the aid of laser-cut serration
- Ergonomic sits comfortably in the hand thanks to double dip coating
- Convenient thanks to quick adjustment with proven HAZET tip / step lever function
- Heavy-duty pliers legs made of case-hardened chrome vanadium steel · Fine detent enables any wrench size in the clamping range
- Phosphatised surface





Production

function

Nail and wire holder



Square







Clamping range mm

26

33

42

56

EAN-No.

4000896+

249800

249640

249787

249664

More force thanks to teeth offset against the direction of rotation!

Production

Product video







Square



One-hand operation with tip/step lever function



H <u>AZET</u> No.	[mm	Detent distance mm	Detent positions Number	Clamping range mm	Clamping range O mm	EAN-No. 4000896+	
760-12	125	2	13	27	32	249749	
760-15	150	2	14	34	38	249688	
760-18	180	2	17	36	42	249763	
760-26	260	2.5	17	50	52	249701	





Errors excepted.





SYSTEM 5000-3CT Torque wrenches – our workshop classics!

- Large measuring range: 1 800 Nm
- 10 versions incl. 1/4", 3/8", 1/2", 3/4" reversible ratchet with square drive for commercial vehicle applications
- Accuracy: ±3 % of scale value (5107-3CT: ±4 %)
- Tested according to DIN EN ISO 6789-2:2017 with calibration certificate and serial number
- HAZET's own service centre for best aftersales service
- Developed and produced by HAZET "Made in Germany"



1

1/4" • 3/8" • 1/2" or 3/4" torque wrench


- Adjustment aid with detent points for optimised operator guidance ensures safe and fast adjustment of the desired torque value by turning the handle
- Trigonometric shape of the blue rotary assembly prevents uncontrolled rolling away
- Accuracy ±3 % of the scale value (in direction of actuation for right-hand tightening)/5107-3 CT ±4 % accuracy of scale value
- Integrated shift lever with free-running function for the measuring ranges 20 320 Nm reduces the risk of injury and malfunction (5121-3CT, 5122-3CT, 5123-3CT)
- Outside square according to DIN 3120, ISO 1174-1

SYSTEM 5000-3CT

No.	H <u>AZET</u> No.		Torque range Nm	Release accuracy tolerance %	Graduation Nm	[mm	EAN-No. 4000896+	
1	5107-3CT	6.3 1⁄4″	1 – 9	4	0.1	234	218875	
2	5108-3CT	6.3 1⁄4″	2.5 – 25	3	0.25	234	218882	
3	5110-3CT	10 ³ ⁄8	10 - 60	3	0.5	320	218899	
4	5111-3CT	10 3⁄8	20 – 120	3	1.0	375	235384	
5	5120-3CT	125 1⁄2	10 - 60	3	0.5	320	218905	
6	5121-3CT	125 1⁄2	20 – 120	3	1.0	421	218912	
7	5122-3CT	125 1⁄2	40 - 200	3	1.0	519	219001	
8	5123-3CT	125 1⁄2	60 - 320	3	2.0	628	218998	
9	5143-3CT	125 1⁄2	100 - 400	3	2.5	790	235407	




20 3⁄4 25 **1**″

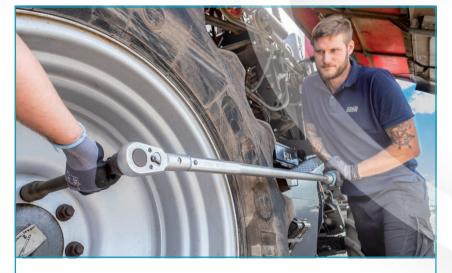

5145-3CT EAN-No. 4000896218929

20 3⁄4″

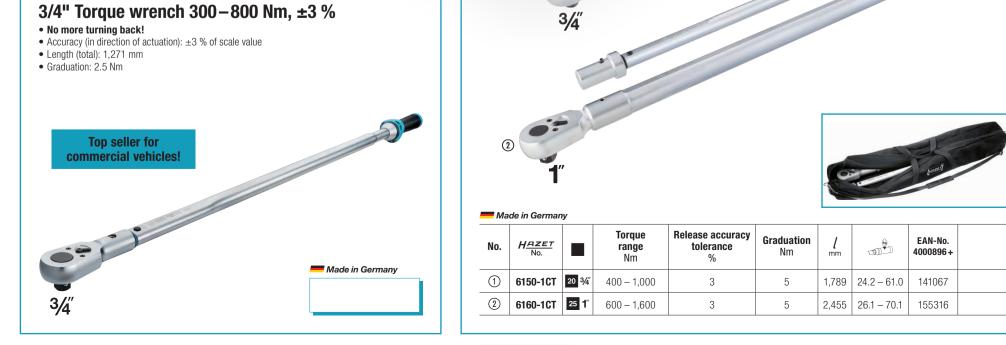

6000-1CT

Incl. bag for safe storage
2-component handle
Viewing window for locking


1

3/4" or 1" torque wrench 400–1,600 Nm, ±3 %

• Accuracy (in direction of actuation): ±3 % of scale value





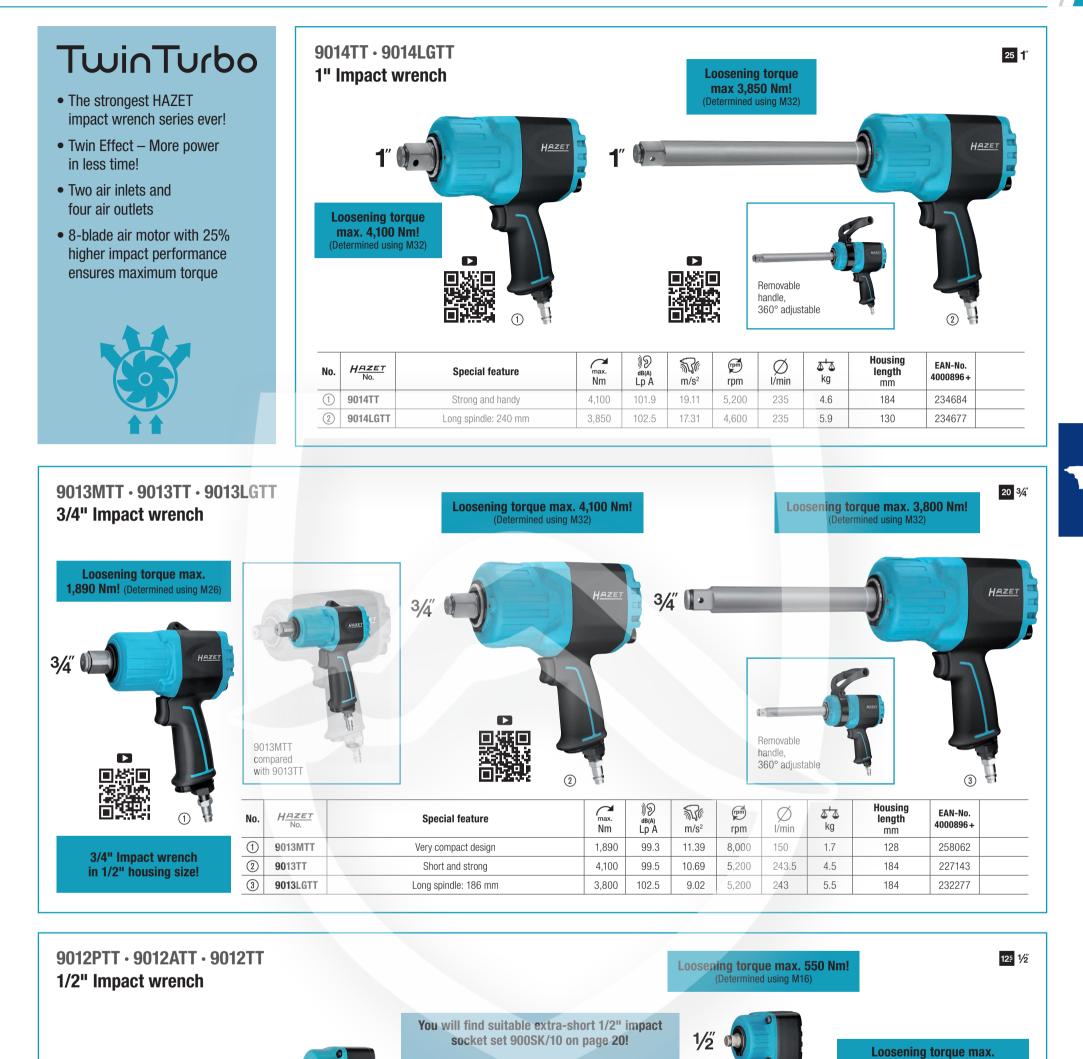














2,200 Nm! (Determined using M16)

No.	H <u>AZET</u> No.	Special feature	max. Nm))) ₀в(а) Lp A	\$} (m/s²	rpm	Ø I/min	<mark>∆⁺∆</mark> kg	Housing length mm	EAN-No. 4000896 +	
1	9012PTT	Extremely compact palm impact wrench	550	92.9	7.64	8,000	113	1.1	86	252732	
2	9012ATT	Short, angled design, 120° swivel	550	90.1	4.89	8,000	113	1.3	70	234738	
3	9012TT	Short design	2,200	99.7	8.69	8,300	147	1.6	128	226924	





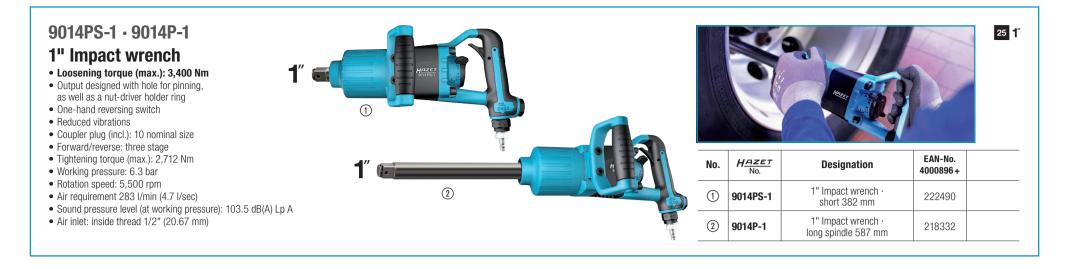



Needle scaler

- · Adjustable needle cover
- · Removes precise, small and large emerging patches of rust
- 19 needles (Ø 3 mm)
- 3,200 impacts/min
- Weight (net): 2.6 kg • Air requirement: 170 l/min (2.8 l/sec)
- Total length: 321 mm
- Coupler plug (incl.): 7.2 nominal size

9035M-6 EAN-No. 4000896258109

Mini needle scaler

- Gentle cleaning of soiled/rusted parts
- especially cleaning of solidar/tested partsespecially cleaning of brake systems etc.Extremely slim/short pin form and free needles
- allow you to reach difficult to access areas as well • 13 thin stainless steel needles (Ø 1.3 mm)
- 3,000 impacts/min
- Length: 236 mm





H <u>AZET</u> No.	·	Designation	EAN-No. 4000896+
9035-5	1	Needle scaler	132355
9035-050	19	Spare needles for needle scaler 9035-5, Ø 3 mm, length 181 mm	139385



Adjustable needle carriage with integrated needle guide ensures long service life





H <u>AZET</u> No.	-	Designation	EAN-No. 4000896+	
9035M-6	1	Mini needle scaler	258109	
9035M-050	13	Spare needles for mini needle scaler 9035 M-5, \varnothing 1.3 mm, length 81 mm	233205	

With air outlet adjustable by 360°

9041G-1 EAN-No. 4000896212385

Tyre inflator • calibrated

- Manometer measuring range: 0-12 bar, graduation: 0.1 bar
- Pressure (max.): 12 bar
- Temperature range: -20 to 60 °C
- Scale values in bar
- · Hose with plug-in nipple
- Measuring tolerance: -15 °C to 25 °C, 0 to 4 bar: ± 0.08 bar, from 4 to 12 bar: ± 0.16 bar
- Hose length: 1,000 mm
- Recalibration possible (not carried out by HAZET)








9041D-1 EAN-No. 4000896212378

Tyre inflator · digital

- Manometer measuring range: 0-12 bar, graduation: 0.01 bar
- Pressure (max.): 12 bar
- Temperature range: -20 to 50 °C
- Display toggles between bar/PSI/kg/cm²
- Hose with plug-in nipple
- Measuring tolerance: -15 °C to 25 °C: ±0.1 bar
- Hose length: 400 mm



Ø 63 mm



Tyre inflator • standard

- Manometer measuring range: 0-12 bar, graduation: 0.1 bar
- Pressure (max.): 12 bar
- Temperature range: -10 to 40 °C
- · Scale values in psi and bar
- Hose with plug-in nipple
- Measuring tolerance: -15 °C to 25 °C: ±0.3 bar
- Hose length: 400 mm

Top seller!




Ø 63 mm











9048P-2/3, EAN-No. 4000896234608

Wash-gun set

- Effective, powerful and solvent-free cleaning of e.g. cooling systems with graduated system cleaning nozzle
- Cleaning without the use of aggressive chemicals or solvents
- Swivel joint at the water connection, helps to avoid "hose spaghetti"
- · Continuous independent regulation of water and compressed air supply

1


- Temperature range -10 to 40 °C
- Weight (net): 0.4 kg
- Coupler plug (incl.): 7.2 nominal size

Contents:

- Water connection variants: 1/2" (13 mm) nipple for water coupling (Gardena system compatible) or 3/4" (20 mm) GHT hose thread
- Jet washing nozzle ①
- Graded system cleaning nozzle 2






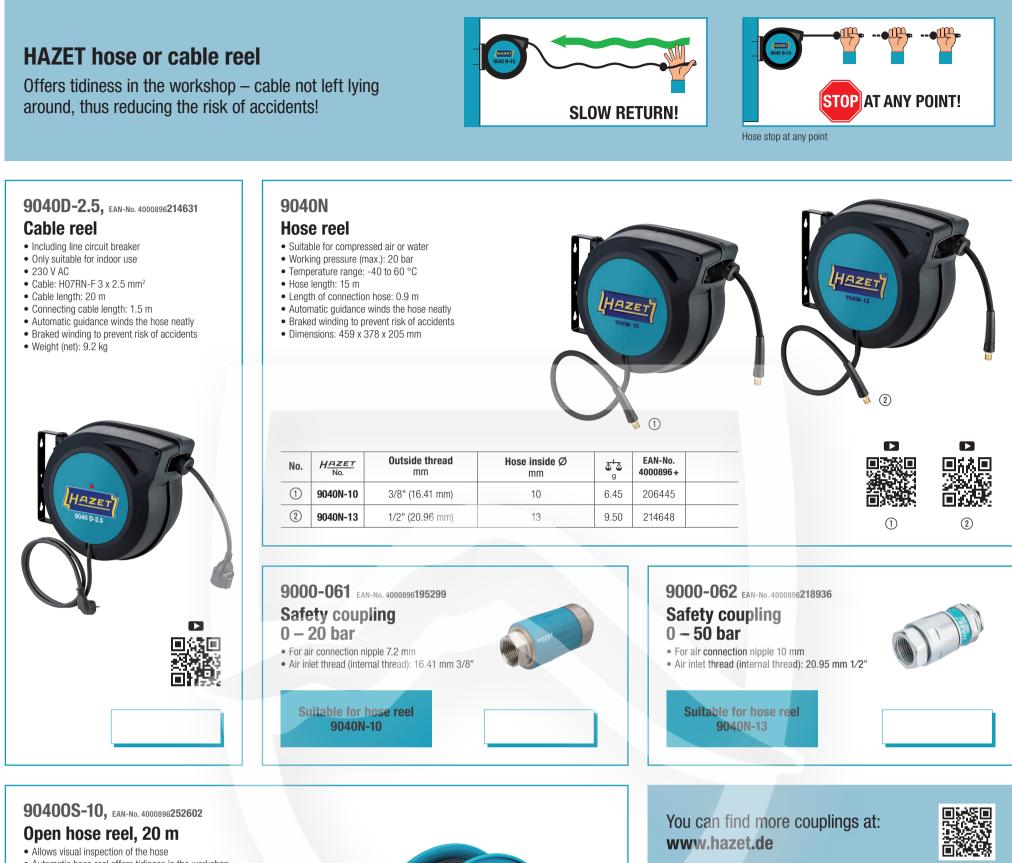

- Automatic hose reel offers tidiness in the workshop Hose not left lying around, thus reducing the risk of accidents Open design against accumulation of dirt
- For compressed air
- Inside diameter of the hose: 10 mm
- Hose length: 20 m
- Working pressure (max.): 12 bar
- Spring return with ratchet locking holders
- Including sturdy swivel base
- Integrated roller inlet
- Hybrid polymer hose, black
- Connection hose (length): 1 m
- Air inlet: outside thread 3/8" (16.41 mm)
- Including German air connection nipple for air inlet 9000-015
- Can be used with HAZET safety coupling 9000-061







- Including ARO 210 nipple
- Weight (net): 11.68 kg



Robust steel design with ball-bearing guiding rails!



Swivel range: 180°





9040-7 · 9040S-10 Spiral hose

- High flexible polyurethane hose
- Connecting pieces with 360° swivel joints
- Temperature range: -20 to 60 °C
- Hose length: 7.62 m
- · Working pressure: 10 bar



For compact hose management!

H <u>AZET</u> No.	Hose inside Ø mm	₫ [±] ₫ g	EAN-No. 4000896+	
9040-7	6.35	0,63	153404	
9040S-10	10	11,68	212361	



Agricultural tools



Operation using ratchet with inserted ½" (12.5 mm) (1/2") 4-point socket

125º 1⁄2″










Facilitates work on the

CLAAS maize header!

Made in Germany



No.	H <u>AZET</u> No.	Designation	Cutting width mm	Handle length mm	∆ '∆ g	EAN-No. 4000896+	
1	2135-3000	Sledgehammer	75	900	3.000	231157	
2	2133-1250	Wood axe	132	700	1.250	231133	
3	2132-600	Hand axe	105	360	600	231140	
4	2134-1250	Riving axe	92	500	1.250	229529	
5	2132-3	Pickaroon	-	400	550	244607	



High handling comfort thanks to light weight!



No.	. HAZET Designation		Design	₫ ⁺ ₫ g	EAN-No. 4000896+	
1	2132-1	Aluminium felling wedge · straight	Conical	550	244805	
2	2132-2	Aluminium splitting wedge \cdot rotated	Conical and reversed	800	244799	





TOTALLY INSPIRING!

Revolutionary new HAZET cordless tool SYSTEM – compatible with all devices of the new 9500 SYSTEM

- Power to work independently
- Innovative battery technology
- Enhanced performance
- Variety of devices
- More applications
- Extremely compact machinery





Rechargeable battery system 9500 | 18 V

No.	H <u>AZET</u> No.	Article	Benefits of the product	EAN-No. 4000896+
1	9530-10	Cordless drill 18 V	Tightening torque, hard (max.): 65 Nm	266142
2	9512-600	1/2" Cordless impact wrench, compact 18 V*	Loosening torque (max.): 600 Nm	265053
3	9512-950	1/2" Cordless impact wrench 18 V*	Loosening torque (max.): 950 Nm	265039
4	9513-2100	3/4" Cordless impact wrench 18 V*	Loosening torque (max.): 2,100 Nm	265015
5	9533-10	Cordless right-angle grinder 18 V*	Revolutions per minute: 10,000	265091
6	9534-10	Cordless reciprocating saw 18 V*	Long stroke: 25 mm	265077
1	9579-10	Cordless work light 18 V*	1,000 lm	265275
8	9590-10	Cordless heat gun 18 V*	2 temperature levels: 260 and 530 °C	265299
9	9544-10	Hybrid fan 18 V*/230 V	Hybrid function: Battery 18 V or power supply unit 230 V	264995
10	9580-10	Professional hybrid cordless DAB radio with Bluetooth, 18 V* and 230 V	2 x 10 Watt	264971
(1)	9543-10	Cordless dry vacuum cleaner 18 V*	Underpressure (max.): 12,000 Pa	264957



Battery with patented Thermatec[®] technology:
Integrated cooling system to extend service life
Electronic Management System (EMS) protects battery pack, extends service life and increases efficiency

*Without battery and charger

⇔_230V

H <u>AZET</u> No.	Article	Benefits of the product	EAN-No. 4000896+	
9633-10	Electric right-angle grinder 230 V (corded)	Revolutions per minute: 12,000	264919	
9643-10	Electric dry vacuum cleaner 230 V (corded)	Underpressure (max.): 23,000 Pa	264933	

Accessories for cordless dry vacuum cleaner 9543-10 and 9643-10 corded vacuum cleaner

No.	H <u>AZET</u> No.	Article	EAN-No. 4000896+
1	9543-04/7	Cleaning set	270989
2	9543-01/5	Fleece filter bag set	270965
3	9543-02	Flat pleated filter	270941
4	9543-03	Chassis	270927





Integrated LED light with persistence afterglow



Brushless motor with high efficiency and long service life











EAN-No. 4000896265114

9501-1018

Quick charger for 10.8 V and **18 V batteries**

- 80% of the charging capacity is reached after 30 minutes
- Large LCD display for detecting state of charge and battery diagnostics

NEW!

7.....

18V











HAZET thermal camera – For the best possible view!




- USB-C cable (A to C) 1 m

	4812-23/5AF			
Camera probe	\varnothing 3.9 mm probe with front camera can be swivelled up to 180° (articulation see $$)			
Display	127 mm (5") large, sunlight-readable, reflection-reduced touch display			
Zoom	3 x			
Display resolution	800 x 480 pixels			
Brightness setting	5 + 5 level boost			
Energy source	Rechargeable Li-ion battery. Charging time: 3.5 h, operating time: 4 h			
Image format (jpg)	1,920 x 1,080 pixels			
Video format	MP4, 1,920 x 1,080 pixels (MOV format) with optional watermark, timestamp and audio			
Data transfer	USB-C (access either to camera or as card reader)			
IP protection rating (basic unit)	IP54			
Connectivity	Camera can be used via HDMI on the display or USB-C on the PC			
Weight	705 g			
Dimensions (L x W x H)	162 x 128 x 46 mm			

- Charging cable USB-A to USB-C 1.0 m

|--|



Depending on the smartphone connected

3-level Removable Li-ion battery (1 x type 16850) without additional tools 960 x 720/1,280 x 720 pixels

MP4, 960 x 720 / 1,280 x 720 pixels

USB-C IP54 (basic unit) | IP67 (probe) USB-A to USB-C / USB-A to Lightning / USB-A to Micro-USB 380 g





Joystick control



Control over operating elements



General workshop equipment








With pouring spout













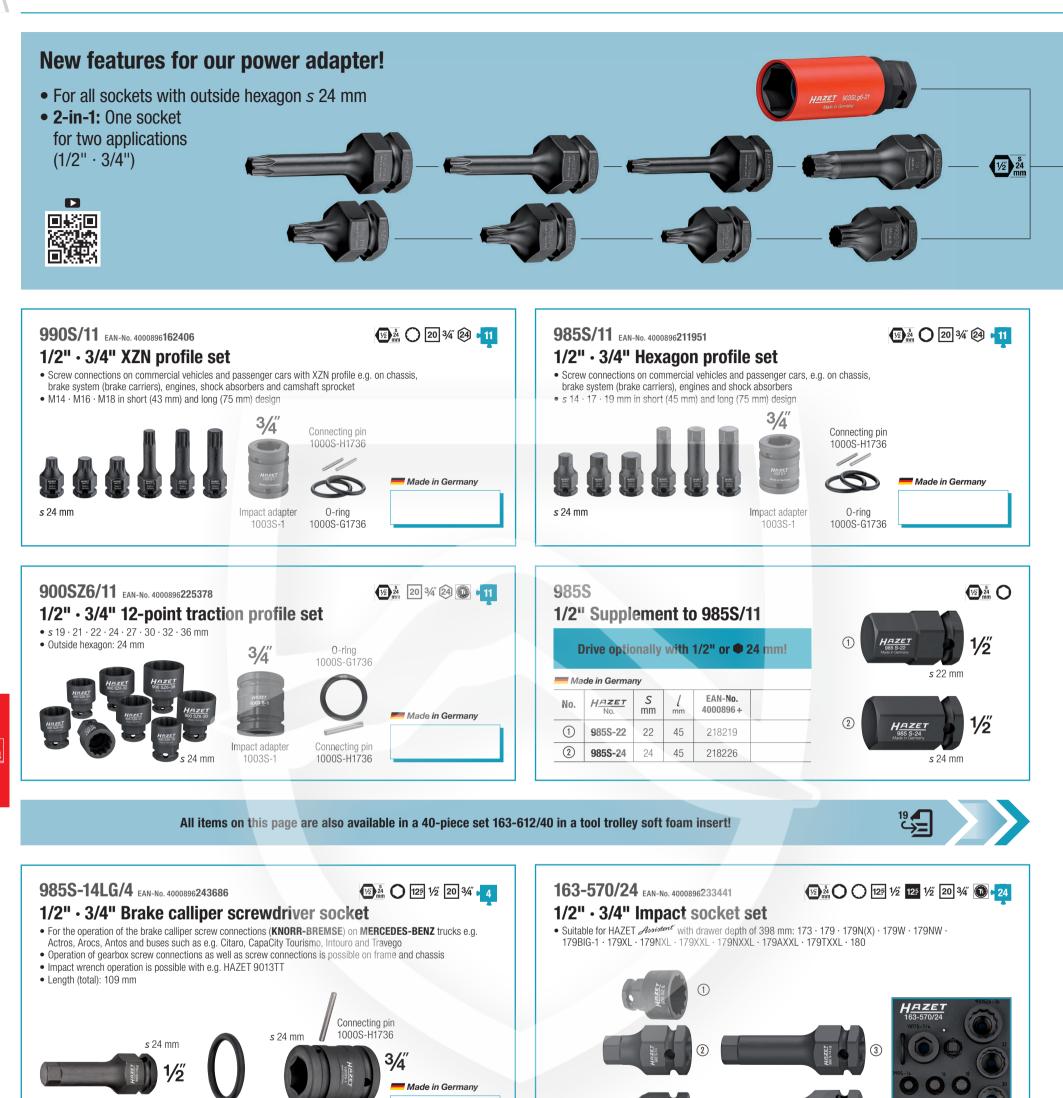

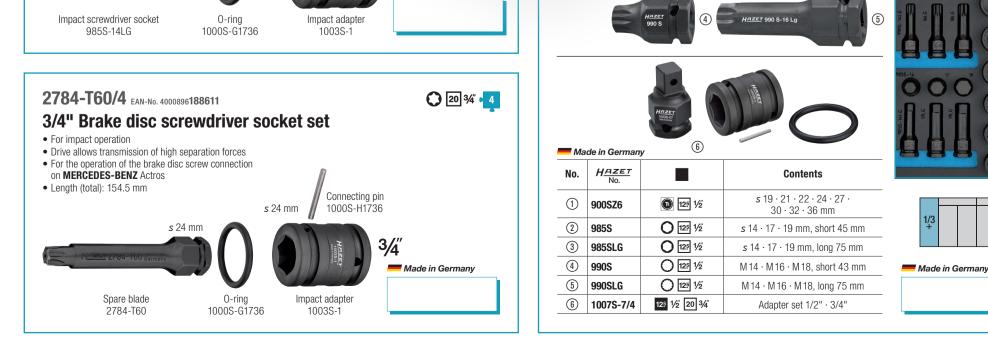



Wheels | Tyres




0 2

1⁄2 24 mm

NEW!



NEW!



163-612/40 EAN-NO. 4000896264704

1/2" · 3/4", 24 mm Impact socket set

- Screw connections on commercial vehicles, passenger cars and vans with TORX® profile, e.g. on the chassis, brakes, wheel screw connections
- Operation with various drive tools possible:
- 1/2" ratchet or impact wrench
- s 24 mm socket and box-end wrench.
- open-end wrench or ratcheting combination wrench
- Adapter 1003S-1 enables drive in 3/4", e.g. with HAZET 3/4" impact wrench 9013TT
- For HAZET Assistent[®] with a drawer depth of 398 mm: 173 · 179 · 179N · 179NX · 179W · 179NW · 179BIG-1 179XL · 179NXL · 179XXL · 179NXXL · 179AXXL · 179TXXL · 180

Contents:

O 990S-1 · 1003S-07 · 1000S-G1736 · 1000S-H1736 **O** 990S-12, -12Lg, -14, -14Lg, -16, -16Lg, -18, -18Lg **O** 985S-14, -14Lg, -17, -17Lg, -19, -19Lg, -22, -24 **O** 900SZ6-18, -19, -21, -22, -24, -27, -30, -32, -36 O 995S6-T40, -T40Lg, -T45, -T45Lg, -T50, -T50Lg **O**903SLg6-17 · 6-19 · 6-21 **O** 900SLg6-24





990S-12/2 EAN-NO. 4000896264667

1/2", 24 mm outside hexagon impact screwdriver socket set,

internal serration XZN

- Operation with various drive tools possible:
- 1/2" ratchet or impact wrench
- s 24 mm socket and box-end wrench or open-end wrench
- Adapter 1003S-1 enables drive in 3/4", e.g. with HAZET 3/4" impact wrench 9013TT
- . Screw connections on commercial vehicles, passenger cars and vans with XZN profile, e.g. on the chassis





6-piece set:

- 3 short sockets (43 mm): 995S6-T40, 995S6-T45, 995S6-T50
- 3 long sockets (75 mm): 995S6-T40Lg,
- 995S6-T45Lg, 995S6-T50Lg





💳 Made in Germany

4

impact socket set


- Operation with various drive tools possible:
- 1/2" ratchet or impact wrench
- s 24 mm socket and box-end wrench or open-end wrench
- Adapter 1003S-1 enables drive in 3/4", e.g. with HAZET 3/4" impact wrench 9013TT
- Double protection: Easy-to-rotate external plastic sleeve (replaceable) to protect the rims when screwing wheel bolts. Plus: Internal plastic insert to protect the surface of wheel bolts









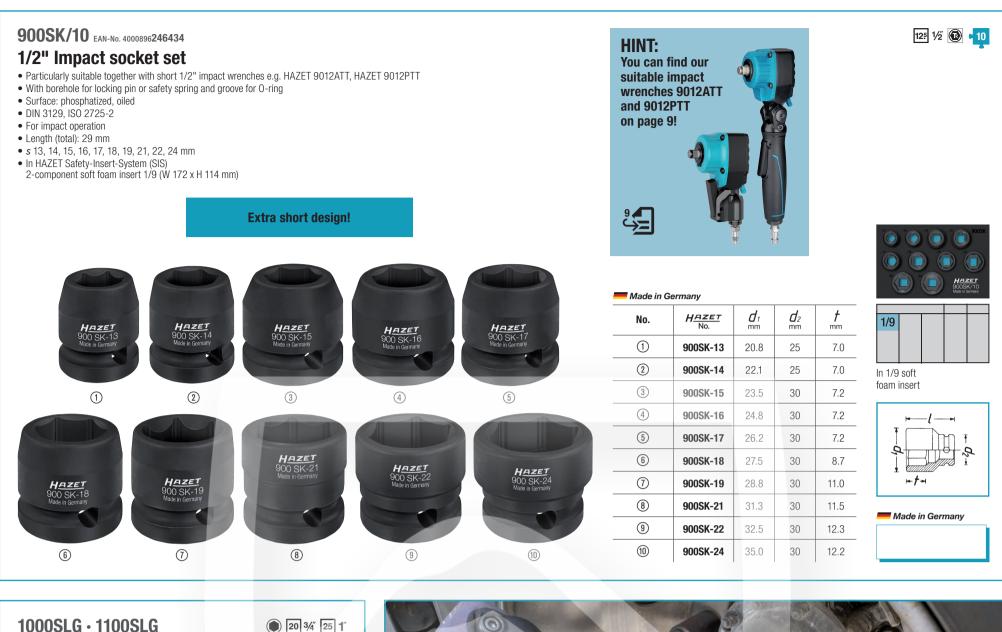

1000SLG · 1100SLG 3/4" · 1" Impact socket (6-point)

• Long design!

• With borehole for locking pin or safety spring and groove for O-ring

• Surface: phosphatized, oiled

• DIN 3129, ISO 2725-2



H <u>AZET</u> No.	d ₁	d_{2}	†	EAN-No. 4000896+					
1000SLG-24	39.5	44	17	001392					
1000SLG-27	43.5	44	19	001408					
1000SLG-30	47.5	44	21	001422					
1000SLG-32	50.0	44	21	001439					
1000SLG-33	51.5	44	21	001446					
1000SLG-36	55.0	44	23	001460					



1004S · 1104S 20 3⁄4" 25 1" 3/4" · 1" Impact socket (6-point) • DIN 3129, ISO 2725-1 1004S-32 . Especially long 6-point socket design e.g. for deep wheel nuts and bolts on commercial vehicles • For impact operation 1 • Surface: phosphatised 3⁄4″ HAZET 1004S-32 32 mm 1004S-33

Extra long design



Made in Germany

H <u>AZET</u> No.	d 1 mm	d ₂	† mm	EAN-No. 4000896+	
1100SLG-24	41.5	54	17	002405	
1100SLG-27	45.0	54	19	002412	
1100SLG-30	49.0	54	21	002429	
1100SLG-32	51.5	54	21	002436	
1100SLG-33	52.5	54	21	002443	
1100SLG-36	56.5	54	23	002467	
1100SLG-38	59.0	54	24	002474	
1100SLG-41	63.0	54	26	002481	
1100SLG-46	69.5	54	28	002498	

• E.g. for deeply located wheel nuts and bolts on commercial vehicles

• With borehole for locking pin or safety spring and groove for O-ring



1104S-32

For impact operation


With bolt for locking pin retaining

Surface: phosphatised



💳 Made in Germany

No.	H <u>AZET</u> No.		[mm	d 1 mm	d 2 mm	† mm	EAN-No. 4000896+	
1	1004S-32	20 3⁄4″	400	48.0	44.0	32.0	055784	
2	1004S-33	20 3⁄4″	400	48.0	44.0	32.0	055791	
3	1104S-32	25 1 ″	270	48.5	54.0	30.5	002665	









4802-1 EAN-NO. 4000896200030 Commercial vehicle

vacuum radiator filler

- Fast cooling fluid flow rate: approx. 80 l in 20 minutes
- No cooling fluid is lost through the cooling system overflowing
- Separate control through the diagnostic testing device is no longer necessary
- Vacuum leakage test before filling the cooling system
- Bubble-free filling of the coolant and heating circuit in trucks, buses, agricultural machinery and construction vehicles
- Can be used together with single or universal adapters (see table on right)

80 litres in 20 minutes!




9	4800-20	TGL model year 04/2005 → · TGM model year 10/2005 → · TGS model year 10/2007 → 01.2012 · TGX model year 10/2007 → 01.2012 · MERCEDES-BENZ commercial vehicles Actros · Atego 1217 model year → 1999 · Eco 8401 · SK1728 Antos · Arocs · Atego model year 1998 → 2013 · Axor model year 09/2001 → 10/2004 · Econic · Zentros · CLAAS Xerion, Tucano	144242	
10	4800-21A	Volvo commercial vehicles · Scraper tractor dumpers	162185	
(11)	4800-23	ISUZU truck · MITSUBISHI commercial vehicle Fuso Canter · NISSAN forklifts · YALE GDP/GLP 16-30	144273	
(12)	4800-25	MAN buses such as Lions Coach · Lions Star · Lions Comfort · Lions City · MERCEDES-BENZ Citaro model year 01/1998	203857	
(13)	4800-26	DAF CF and XF Euro 6 from 2013	214495	
(14)	4800-27	MERCEDES-BENZ Atego from model year 2014	214501	
(15)	4800-28	MERCEDES-BENZ Actros EURO 6 with HEYCO expansion tank from model year 2014	214518	
(16)	4800-29	SCANIA 143, G-/P- and R series	222780	





Engine



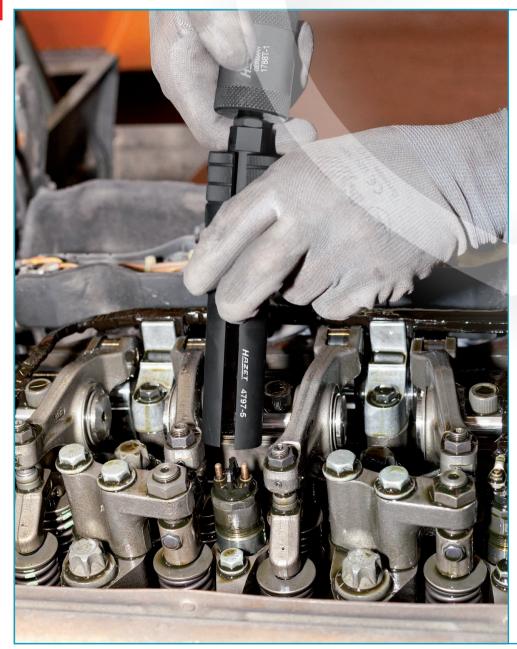

4797-5 EAN-No. 4000896176137

Injector extractor

- For disassembly of tight common rail injectors without removing the cylinder head
- For the simple removal of injectors together with sliding hammer, e.g. HAZET 1788T-1, on **MAN** engines D08, D20, D26 and D28
- Especially suited to the very limited space in the cylinder head • Due to the tool's special claw, the injector may be gripped with caution, damage-
- free removal with the aid of the impact extractor • Injector claw with inside thread M10 x 1.5 mm for insertion
- of the sliding hammer 1788T-1



💳 Made in Germany

To be used in combination with 1788T-1!

1788T-1 EAN-No. 4000896134304

Sliding hammer

- With coupler thread M 10 (sliding weight 200 g)
- Together with injector extractor 4797-5
- Coupler thread M10
- Incl. union nut

📕 Made in Germany





Engine



Exhaust probe sockets

- Robust design for fixed exhaust gas probes!
- Removal and installation of the lambda probe, particle sensor, NOX sensor and exhaust gas temperature sensor
- Double square 1/2" drive
- Torque-controlled tightening possible
- For manual operation
- Dimensions (L x H): 66 x 39 mm
- Slot width: 8 mm



Exhaust probe sockets • Length: 66 mm	
Image: NEW! Image:	
① 4680-7 24 2541	18
2 4680-8 24 2541	32
HAZET 4680-10 HAZET 4680-5 HAZET 4680-6 (2) 4680-8 (2) 4680-8 (3) 4680-9 (2) 4680-8 (2) 4680-8 (3) 4680-9 (2) 4680-9 (2) 4680-9 (2) 4680-8 (2)	56
NEW! ④ 4680-10 24 2670	26
5 4680-5 30 0578	370
④ s 20 mm ⑤ s 22 mm ④ s 24 mm ⑥ 4680-6 30 2522	68

Special tap for exhaust gas temperature sensors / probes

- Professional repair, cleaning or repairing of the mounting threads of the exhaust gas temperature sensors / probes
- Guide bolt prevents jamming of the thread repair tool, thereby enabling exact repair or cleaning of the sooty or damaged threads
- Time saving: replacement of the exhaust system is no longer necessary in most cases
- High-quality TiAIN coating for longer service life
- Suitable for application on stainless steel components
- Drive: s 13 mm



2	4683-14	For exhaust gas temperature sensors on: MERCEDES-BENZ Truck · AUDI · PORSCHE · SEAT · ŠKODA · VW · FIAT · ALFA ROMEO · LANCIA · OPEL	M14 x 1.5	45	253579	
3	4683-16	For exhaust gas temperature sensors on: MERCEDES-BENZ Trucks, Bus & DAF commercial vehicles Actros (930, 932, 933, 934, 938) · Axor (375, 940, 942, 943, 944, 950, 952, 953, 954, 958) · Atego (375, 950, 952, 953, 954, 958) · MB Bus O 500 BM382 · DAF CF 65 · DAF CF 75 · DAF CF 85 · DAF CF 105	M16 x 1.5	43	253593	
4	4683-20	For NOX sensors on: DAF • MERCEDES-BENZ Trucks • IVECO • MAN • SCANIA • RENAULT Trucks • Volvo Trucks	M20 x 1.5	50	253630	
5	4683-22	For particle sensors on: MERCEDES-BENZ · MAN	M22 x 1.5	50	253654	










4937-105/2 EAN-No. 4000896201938

1" Commercial vehicle axle nut socket set DAF, RENAULT, Volvo

- Hexagon output: s 105 mm
- Drive: 1" (25 mm) and outside 6-point s 60 mm
- Screw-in guide tube allows for flexible application
- **DAF** with guide tube
- **RENAULT, Volvo** without guide tube
- With outside guide collar







Made in Germany










4937

Commercial vehicle mounting sleeves

Mounting sleeve to protect the thread on the axle during bearing disassembly and assembly
Only lift the 40 kg bearing unit (bearing + brake disc + wheel hub) onto the mounting sleeve once, then push up to the bearing seat

2

• Drive via lateral rod or without additional tools is possible (ribbed handle surface)

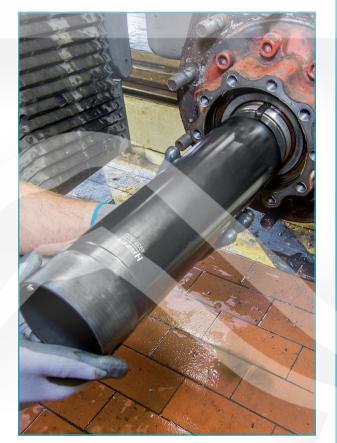

📕 Ma	de in German	ly				
No.	H <u>AZET</u> No.	Use	Thread mm	Outside Ø: mm	EAN-No. 4000896+	
1	4937-100	MAN TGX, TGA, TGS e.g. for MAN HY 1350 axle (13 t)	M 100 x 1.5	105	201983	
2	4937-7582	MAN TGL, TGM, L-Series, HL 2	M 75 x 1.5	82	201969	
3	4937-7578	MERCEDES-BENZ Atego, Atego 2, Tourino	M 75 x 1.5	78	201990	

3

4937 20 3⁄4 25 1″ 3/4" • 1" Commercial vehicle hub cap socket, Ø 110 mm and 120 mm for flat oval BPW hub cap

 For **BPW** Eco and Eco Plus axles
 Perfect fit for **BPW** contour Ø 110 mm, or Ø 120 mm







197-4 EAN-No. 4000896214235

4937 1/2" Commercial vehicle centring sleeve set

1

- For fast assembly of centred truck drop centre rim wheels for rim hole \varnothing 26 mm





- No damage to the thread as well as exact centring of the rims thanks to conically cranked sleeves
- Length (total): 115 mm



📕 Made in Germany

H <u>AZET</u> No.	For rim hole Ø 26 mm	EAN-No. 4000896+	
4937-26/3	M22 x 1.5 e.g.: DAF, FORD, MAN, MERCEDES-BENZ, RENAULT, Volvo	199013	
4937-27/3	7⁄8"-11G e.g. SCANIA	202010	

Commercial vehicle axle oil collecting pan 3 l

- Safe collection of the oil dripping from the axle when disassembling or repairing the floating axles on trucks and agricultural machinery
- Chemical-resistant, unbreakable plastic with smooth, abrasion-proof surface
- Dimensions (L x W x H): 310 x 240 x 160 mm







4972-1/3 EAN-No. 4000896215799

• Significantly easier work when assembling

trailer axles

• No strain on the back • Second person not required

• Makes screw tightening easier · Secure hold for heavy components • Takes the various installation situations of the brake calliper into consideration · Secure movement with suspended components • One-hand operation possible via spindle

Commercial vehicle lifting aids

Brakes

Secure retention and movement of heavy components

- Suitable for all brake callipers and wheel hubs
- Brake calliper removal and installation with just one tool
- All brake service work can be carried out without straining your back


Designation

Wheel hub holder

• Compatible with all brake callipers that have European type approval



216031



4972-2 EAN-No. 4000896215393

Swivel bearing

• For disassembly and assembly of brake callipers in trucks, buses, trailers and trailer axles that are

- Together with brake calliper holder HAZET 4972-1



trailers and trailer axles using a nut-driver

12 s 12 mm ()

13

installed in a diagonal "clockwise position between 8 o'clock and 5 o' clock"

- Connect swivel bearing to brake calliper holder and position with e.g. jacking carriage below brake calliper. This enables easy insertion of the screws even in awkward positions




1

2

4972-1

4972-4

Contents: Lifting aid · Brake calliper holder · Wheel hub holder

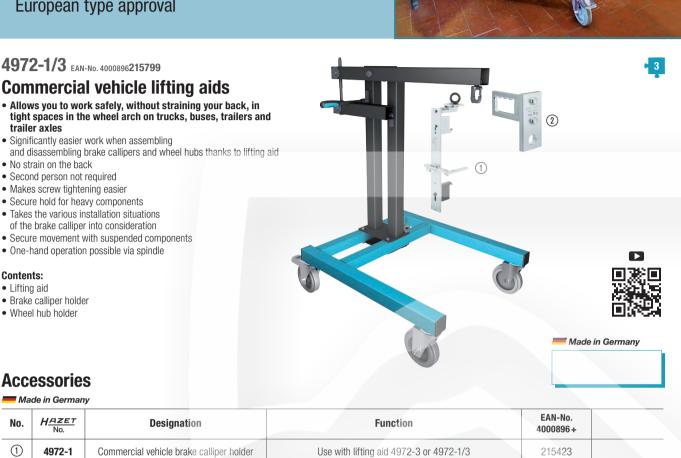



Use with lifting aid 4972-1/3

2871-E

Brake calliper TORX® socket

- Operation of the brake calliper screw connection on MAN commercial vehicles
- Application: Brake calliper screws E20
- Drive: 22 mm outside hexagon
- Operation e.g. with HAZET socket box-end wrench 6630D-22 together with tool holder 6397 (loosening) or torque wrench 6293-1CT or 6295-1CT (tightening)

HAZET 2871-E18 Made in Germany	HAZET 2871-E20 Made in Germany	HAZET 2871-E24 Made in Germany

No.	H <u>AZET</u> No.	For e.g.	l mm	S mm	d 1 mm	d 2 mm	† mm	mm	EAN-No. 4000896+	
1	2871-E18	MAN TGM and TGL	39.5	E18	39.5	23.4	16.70	13.5	176175	
2	2871-E20	MAN TGM · TGA	39.5	E20	39.5	25.7	18.49	15.9	148790	
3	2871-E24	$\textbf{MAN} \text{ TGA} \cdot \text{TGS} \cdot \text{TGX}$	39.5	E24	39.5	35.0	22.16	19.7	148783	

4969-612 EAN-No. 4000896204281

Compressed air quick-connector releasing tool

18 mm

- Easy loosening of quick-connectors with \emptyset 6, 8, 10, 12 mm
- For operation with open-end s 13 mm (HAZET 600 N-13), no further tools necessary
- For plug connectors DIN 74324 6 x 1.0 8 x 1.0 10 x 1.0 12 x 1.5 12 x 2.0 mm
- · Enables separation of contaminated tubes and plug connectors
- To be used by one person
- Time saving and therefore also cost saving
- Prevention of injuries



Made in Germanv













2872FS-24 EAN-NO. 4000896209989 1/2" Commercial vehicle




box-end wrench (12-point) with 2 striking faces

- No need to remove the wheel, even if brake cylinder fittings protrude far into the rim
- Use in trucks, buses, trailers and trailer axles without removing the wheel
- For loosening or tightening brake cylinder fittings
- Laser-engraved formula for rapid conversion of the tightening torque specified by the manufacturer
- 2 impact areas enable the force to be applied using a hammer
- Time saving (approx.): 20 min









0	3/4"	1 <u>-1-257</u> 4937-19 a In Saimar	1				
ade in German	3/4 House and the second seco	2		} ↓			
H <u>AZET</u> No.	For e.g.	/ mm	<i>l</i> ₂ mm	a mm	<u></u> <i>b</i>	EAN-No. 4000896+	
4937-19	MERCEDES-BENZ commercial vehicles cardan shaft screw connections	215	120	12	30	215645	
4937-21	MAN commercial vehicles cardan shaft screw connections	215	120	12	30	215638	



= M


No.

1

2



Chassis

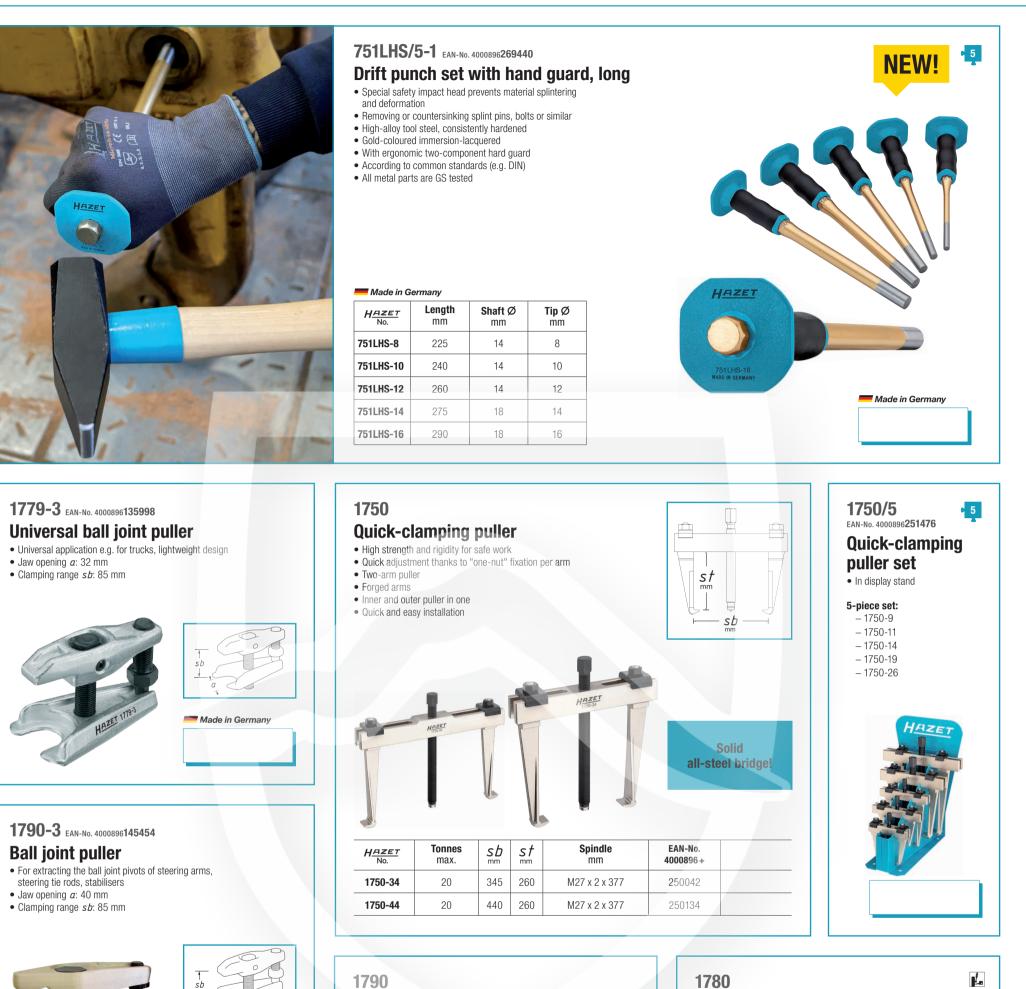

Ball joint puller

- For the easy extraction of ball joint pivots
- and safe removal of ball joints
- · Supported by hydraulic system
- Load (max.): 12 t


Made in Germany

1780


Removal and assembly fork


- Proven and economical system
 - Application: Fast operation of push rod and steering tie rod ends, pitman arms and other parts of the steering thanks to wedge-shaped fork
 - Easy to handle
 - Shock absorber removal and other separation work
 - Application possible in confined spaces







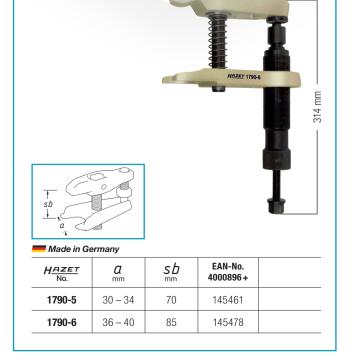









HAZET - Tool expertise in the repair and maintenance of vans

Our recommendations for the light commercial vehicle, van and all kinds of van models: We offer repair solutions for a wide range to ensure an adequate repair. Ensure better repair conditions, especially when repairing the chassis and surrounding components. Our high-quality tools are the perfect problem solver, saving time and money.







ELECTRICAL SYSTEM | BATTERY SERVICE

 QR code fu Simple test of the s and the starting an Transfer of results: For 12 V systems ii motorcycles as wel 4 membrane keys Robust pole termin Large, backlit LCD Tests and detects of including lead-acid batteries, GEL batt LI-ION batteries Device does not re- operational readine Analysis of batterie such as CGA, BCI, Reverse polarity pr Large lead-acid ba e.g. ac Crding to C Large lead-acid ba e.g. to CCA standa Possibility of individ 	starting capacity and condition of d charging system to smartphone/tablet n passenger cars, commercial ve ll as 12 V batteries als with insulated handles display defective cells in all types of start batteries, AGM flat batteries, AG eries, start/stop batteries and rea quire its own battery and guarant ess is in accordance with most batter CA, MCA, DIN, IEC, EN, SAE, GE otection to protect the device, vel ry working range, CA standard 20–1,000 A ttery working range, d 100–2,000 A dualising the test results shared b	vehicle batteries hicles and ing batteries, M spiral chargeable rees constant ry standards, hicle and battery	n of QR codes f sults on a sma	rtphone/tablet		<image/>	GEL BATTI S GEL BA GPANNUNG : AUSWAHLINPUT NENNVERT : TESTWERT : INNENWIDER R : O WECHSE GESUND : C LADUNG :	900 A 259 A 5.07 m
(number plate, repa	air workshop, tester, test date)		0			Starter test!	UHRZEIT :	500 m
				V		Alternator test!	LADETEST : LEERLAUF : WELLIGKEITS :	14.15 14.4 V
			4'4	Dimensions (L x W x D)				
Lithium compatible	Storage temperature °C / °F	Operating temperature °C / °F	g	mm				



2152-610 EAN-No. 4000896268542 **Digital current clamp meter** • Measuring voltage, current and resistance

- With multimeter function
- AC/DC current measurement without disconnecting the cable
- Simple operation thanks to clear control panel and illuminated LCD display
- Small, handy, compact design for use in confined spaces
- . Incl. continuity test, diode test, data hold and auto power-off function
- Protective cover protects current clamp meter against dust and damage from being dropped
- Including CAT III test lead set • Including 2 x 1.5 V AAA batteries

- Storage bag included
 Pliers opening Ø 17 mm
- Measurement category: CAT III 300 V, CAT II 600 V
- Display: LCD with backlight
- Diode test: Yes • Data hold: Yes
- NCV: Yes
- Auto power-off function: Yes, after 15 minutes Capacitance measurement: Yes up to 20 mF

- Power supply: 2 x 1.5 V AAA
 Dimensions L x W x H: 33.50 x 60 x 175 mm
- Weight (without batteries): 150 g





NEW!

Available from

April 2025





Detailed information



3 testing devices in 1: current clamp meter, multimeter and (non-contact) voltage tester!



2152N/3 EAN-No. 4000896204151

Electronic set

- For troubleshooting on electronic components
- Measuring range 3 48 V
- Voltage display LED: 5, 12, 24, 48 V
- Polarity display: LED for positive or negative, AC voltage with illuminated LED
- Additional crocodile clip and probe tip for attaching
- Cable length: 1,300 mm
- Probe tip, needle with sliding mechanism





Electrical system | High-voltage





8816HPKV EAN-No. 4000896239184

岔 1000 V

💳 Made in Germany

811KV/6 EAN-No. 4000896268146

NEW! 🗢 🗣

You can also find other high-voltage

3/8" High-voltage reversible ratchet, with protective insulation

• 3/8" HiPer fine-tooth reversible ratchet – with protective insulation

3⁄8

- 90 teeth, small operating angle of only 4°
- Sockets are securely locked in place
- Attached tools can easily be released by pressing the button
- Locking function of the lever offers protection against unwanted switching
- Surface: with protective insulation
- Protective insulation up to 1,000 V
- IEC 60900
- For manual operation

Hiper







INTOOL SLOVAKIA, s.r.o., Národná 814/4, 010 01 Žilina, tel: +421 904 001 920 www.intool.sk




179NXL-8/388 EAN-No. 4000896268801 Assistent with 388 expert tools for commercial vehicles • Tool trolley 179NXL-8 with stainless steel work surface


• 7 flat drawers and 1 high drawer



Tool trolley Assistent 179NXL-8NKW Dimensions (H x W x D): 1,020 x **959** x 518 mm

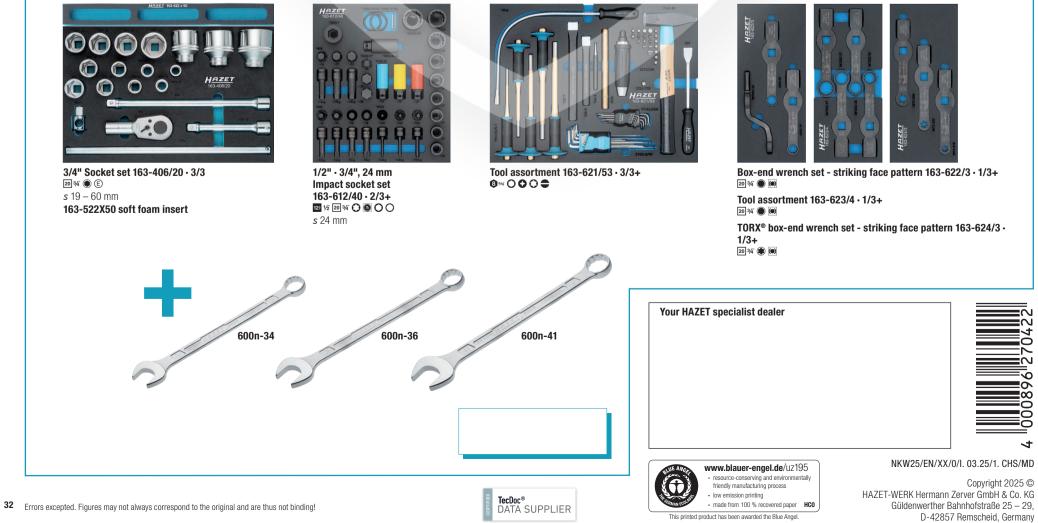



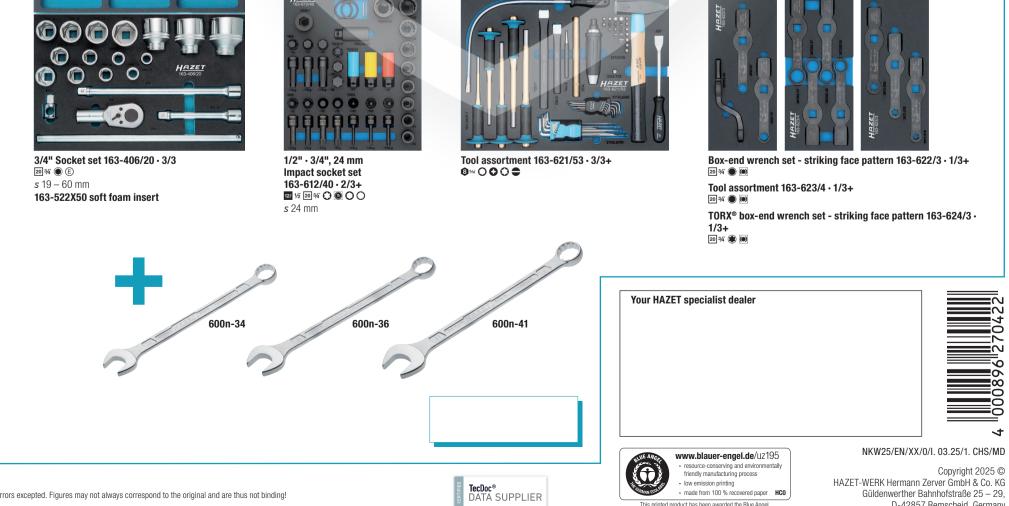





Screwdriver set 163-619/35 · 4/3+ ● ○ ○



Tool assortment 163-618/184 · 4/3+ \$\$ 14 63 1/4° 129 1/2° 10 3/6° **€ ○ ○ ○ ◎ ⊙ ◎**



Tool assortment 163-620/42 · 4/3+

